


## APS-Series Dual Channel Power Amplifiers

The Solution2 APS series offers a range of budget-friendly 2-channel amplifiers with professional features and specifications. All models are built for the rigors of live 'on the road'. Available power ranges from 700 Watts per channel to 2000 Watts per channel in 4 Ohms. Due to the high damping factor and careful design, these amplifiers sound superb, as well on top-cabinets as on sub-cabinets. The APS range is ideal for mobile PA use or fixed installations as in nightclubs, football stadiums,....

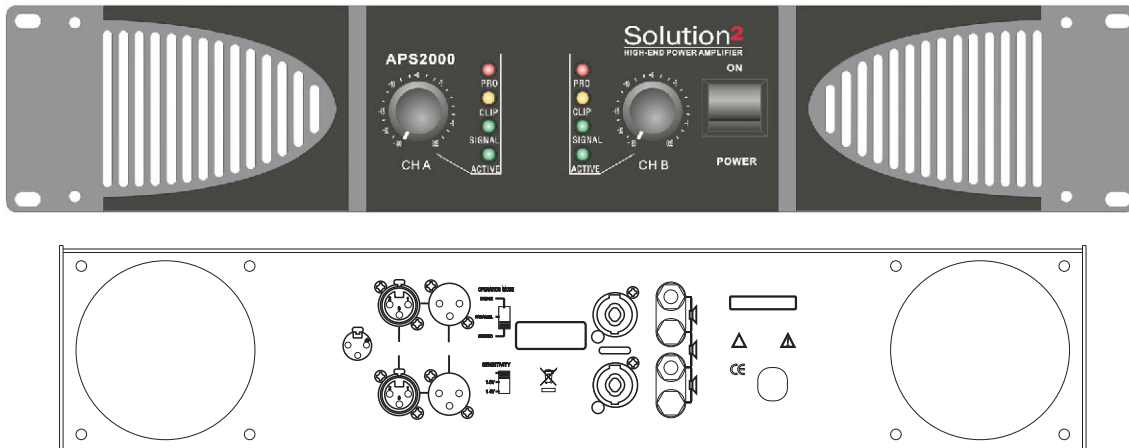

- Features:**
- Balanced inputs on female XLR with male XLR loop trough
  - Speaker Outputs on 4-pole Speakon and Binding Posts
  - Protection: ACL, IGM, AutoRamp, short-circuit, DC voltage, turn-on/off transient, current inrush, sub/ultrasonic input
  - Input Sensitivity switch: 0,775V, 1V or 1,40V.
  - LPF/HPF
  - Cooling: Two rear panel variable speed fans
  - 2 years warranty

	APS2000	APS3000	AP5000	APS8000
Stereo 8 Ohm/ch	500W	700W	1000W	1300W
Stereo 4 Ohm/ch	750W	1050W	1500W	2000W
Stereo 2 Ohm/ch	1100W	1600W	2200W	3000W
Bridged Mono 8 Ohm	1500W	2200W	3000W	4000W
Bridged Mono 4 Ohm	2100W	3000W	4200W	5500W

Freq. Resp.: 1W/8Ohm +/-1 dB 20Hz-20kHz, -3dB@135kHz

<b>Protection:</b>	AutoRamp, short-circuit, DC voltage, turn-on/off transient, current inrush, sub/ultrasonic input			
<b>Damping factor:</b>	550:1	600:1	700:1	800:1
<b>Input Imp Bal/Unbal</b>	20kOhm/10kOhm			
<b>Power Supply</b>	230VAC/50Hz (+/-10%)			
<b>Input Connections</b>	Male & Female XLR			
<b>Output Connections</b>	Binding Post & Speak On			
<b>LED Indicators</b>	Protect, Clip, Signal, Bridge, Parallel, Power			
<b>Cooling</b>	Two rear panel variable speed DC fans			
<b>Dimensions HxWxD (mm)</b>	88 x 480 x 480 (2RU)		132 x 480 x 480 (3RU)	
<b>Net Weight</b>	17,5 kg	20 kg	28 kg	31,5 kg