


AVS-Series Dual Channel Power Amplifiers

The Solution2 AVS series offers a range of budget-friendly 2-channel amplifiers with professional features and specifications. With their compact size and reliable design and performance they are ideally suited for fixed installation in pubs, restaurants, AV-rooms etc.

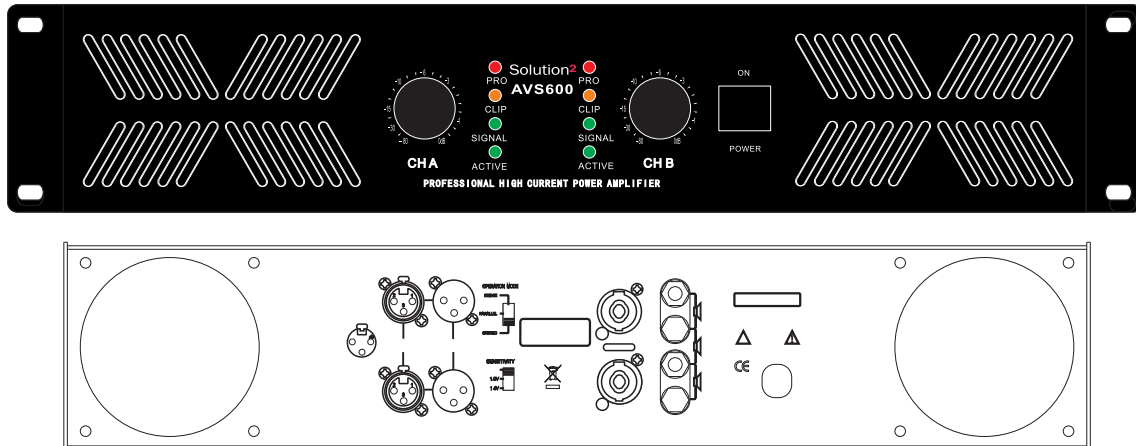

Features:

- Balanced inputs on female XLR with male XLR loop trough
- Speaker Outputs on 4-pole Speak On and Binding Posts
- Protection: ACL, IGM, AutoRamp, short-circuit, DC voltage, turn-on/off transient, current inrush, sub/ultrasonic input
- Cooling: Two rear panel variable speed fans
- 2 years warranty
- Compact Size

	AVS100	AVS200	AVS250	AVS300	AVS600
Stereo 8 Ohm/ch	80W	150W	200W	300W	600W
Stereo 4 Ohm/ch	120W	240W	320W	500W	950W
Stereo 2 Ohm/ch	-	-	-	750W	1400W
Bridged Mono 8 Ohm	240W	480W	650W	1000W	1900W
Bridged Mono 4 Ohm	-	-	-	1450W	2700W

Freq. Resp.: 1W80hm +/-1dB

20Hz-20kHz, -3dB@135kHz

Protection:	AutoRamp, short-circuit, DC voltage, turn-on/off transient, current inrush, sub/ultrasonic input				
Damping factor:	200:1	250:1	300:1	300:1	450:1
Input Imp Bal/Unbal	20kOhm/10kOhm				
Power Supply	230VAC/50Hz (+/-10%)				
Input Connections	Male & Female XLR				
Output Connections	Binding Post & Speak On				
LED Indicators	Protect, Clip, Signal, Bridge, Parallel, Power				
Cooling	Two rear panel variable speed DC fans				
Dimensions HxWxD (mm)	44 x 480 x 404 (1RU)			88 x 480 x 404 (2RU)	
Net Weight	7 kg	10,5 kg	11,5 kg	14,5 kg	17,5 kg