


MAS-Series Multi Channel Power Amplifiers

The Solution2 MAS series offers a range of budget-friendly multi-channel amplifiers with professional features and specifications. The 3 channel version also has a built-in crossover, offering the possibility of powering a complete satellite/sub system with only one amp and without the need of an external cross-over unit. The 4, 6 and 8 channel amps offer very cost-effective solutions for installs (or mobile use) where space and/or cost is restricted.

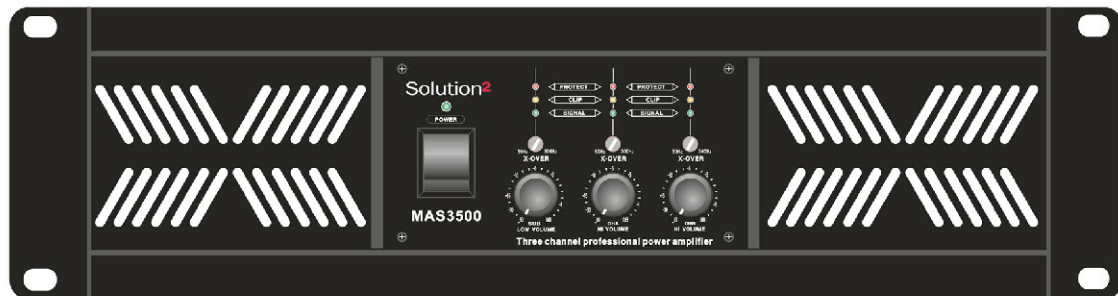

- Features:**
- Balanced inputs on female XLR
 - Speaker Outputs on 4-pole Speakon and Binding Posts (depending on model)
 - Protection: ACL, IGM, AutoRamp, short-circuit, DC voltage, turn-on/off transient, current inrush, sub/ultrasonic input
 - Cooling: Two rear panel variable speed fans
 - 2 years warranty

	MAS3500	MAS4150	MAS4500	MAS6150	MAS8150
Stereo 8 Ohm	3 channel 2 x 500W 1 x 1000W Sub	4 channel 4 x 150W	4 channel 4 x 500W	6 channel 6 x 150W	8 channel 8 x 150W
Stereo 4 Ohm	2 x 750W 1 x 1500W Sub	4 x 250W	4 x 750W	6 x 250W	8 x 250W
Stereo 2 Ohm	1500W Sub	—	—	—	—
Bridged Mono 8 Ohm	n/a	2 x 450W	2 x 1500W	3 x 450W	4 x 450W
Bridged Mono 4 Ohm	n/a	2 x 600W	2 x 2200W	3 x 600W	4 x 600W
Freq. Resp.: 1W/8Ohm +/-1dB	A&B: HPF 50Hz – 300Hz Sub: LPF 50hz – 300Hz		15Hz-20kHz		
Protection:	AutoRamp, short-circuit, DC voltage, turn-on/off transient, current inrush, sub/ultrasonic input				
Damping factor:	550:1 700:1 Sub		550:1		
Input Imp Bal/Unbal			20kOhm/10kOhm		
Power Supply			230VAC/50Hz (+/-10%)		
Input Connections			Male & Female XLR		
Output Connections	Binding Post & Speak On		Binding Post		
LED Indicators			Protect, Clip, Signal, Power		
Cooling			Two rear panel variable speed DC fans		
Dimensions HxWxD (mm)			132 x 440 x 432(3RU)		
Net Weight	32 kg	17 kg	23 kg	22 kg	28 kg